


Product information sheet



ADSL Centralised Filter

The Pressac Centralised DSL Filter is designed to plug into a standard NTE5 residential telephone outlet. It provides a straight through connection for DSL modem connection via a shuttered RJ45 socket as well as a filtered telephone socket and filtered 3 way IDC connector for onward connection of extension telephones. With the centralised filter system, the filter becomes an integral part of the wall socket providing a tidy looking fixture with the added benefit of negating the need for subsequent extension sockets to have microfilters plugged into them.

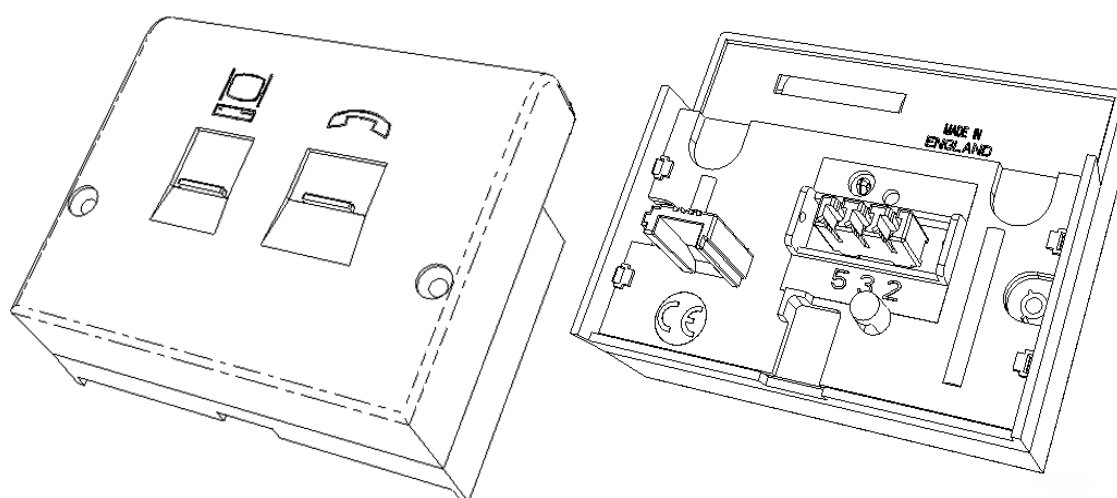

Description

ADSL Centralised Filter

Dimensions (mm)

85 x 70 x 30

Connection ports : Line : BS6312 approved integrated 431A BT plug.
Telephone : Connection via BS6312 4 way BT socket.
Modem : Direct coupled RJ45 (RJ11 compatible) socket
Extension wiring : 3 way IDC connector

Key Features : Moulded from V0 rated material colour matched to BT 1P white
Tested by BT to SIN 346 Issue 2.2
Compatible with Calling Line Identification working
CE Marked – BS EN 55022